

# HARD WAX OIL

A natural blend of quick drying  
durable waxes and oils

Specifically formulated for application onto  
interior wood flooring & surfaces

- Quick Drying
- Easy to Apply
- Easy to Maintain
- Water & Stain Resistant
- Highly Durable
- Child Safe when Dry
- Treadfast
- Excellent Coverage
- Natural Finish

Available in  
**1Ltr & 2.5Ltr**



# Hard Wax Oil



A blend of natural oils & waxes offering exceptional durability & resistance for internal natural wood flooring, kitchen worktops (wood) and areas subjected to a high degree of wear.

Produces a quick drying, natural satin / matt water repellent, tread-fast finish that will not peel or flake. To maintain / renovate, simply wash, buff or re-apply, following the guidelines below.

Suitable for application onto children's toys – EN 71-Toy Safety Test

Resistant to liquids: Tested in accordance with BS 3900 G5

Resistant to wear: Tested in accordance with BS3900 E15

## Preparation

Ensure all surfaces are clean, dry, and free from any previous finish. Sand the substrate with a fine 150 grade sanding paper or 150 grit sanding disk, removing all traces of dust.

## Application

Ensure all areas to be coated are extremely well ventilated during and after application. Always test on a small area prior to initial application.

No primer required. Maximum 2 coats recommended.

Apply at room temperature. Fiddes Hard Wax Oil is formulated for application directly, and does not require thinning.

**First Coat** - Stir contents thoroughly before and during use, and apply in a warm, well ventilated room. Apply THINLY using a good quality bristle or synthetic brush and lay EVENLY, following the direction of the grain. Remove any surplus material immediately with a cloth, carefully checking all areas for any excess application. Leave to dry 4-6 hours in warm, dry well ventilated conditions, or preferably overnight.

**Second Coat** - Apply as first coat, THINLY, allowing good ventilation. Leave to dry 4-6 hours in warm, dry well ventilated conditions, or preferably overnight.

When the surface area is completely dry, a light buff will further enhance the sheen level.

## Notes:

- Ensure all areas to be coated are extremely well ventilated during and after application has occurred.
- Always test on a small area prior to major application.
- Certain dense or oily substrates may only require a single application, and subsequently buffed to achieve the desired finish.
- Longer drying periods may occur during application in cold, damp or humid conditions.
- Always apply sparingly and remove any excess product thoroughly.
- Re-Application: To renovate previous application of Fiddes Hard Wax Oil, lightly sand area with 150 grit sandpaper, and re-apply sparingly.

# Liquid Floor Wax



Fiddes Liquid Floor Wax is a clean, easy to apply, quick drying wax finish which nourishes and protects whilst providing a lasting depth of sheen that naturally enhances the beauty of your wood flooring. Easy to apply, Fiddes Liquid Floor Wax may also be applied on previously treated surfaces to maintain or improve the existing patina.

## Preparation

Sand the wooden substrate in stages, working with a medium sandpaper (120 grit), through to a medium / fine grade (180 –220 grit). Always sand in the direction of the grain pattern where possible, ensuring the removal of any blemishes and glue residue prior to the application of Liquid Floor Wax. Take care to remove all traces of sanding dust. A coat of Fiddes Shellac Sealer or Clear Glaze is recommended on open grained wood flooring prior to application.

## Application

Take a clean cotton cloth and lightly apply in the direction of the wood grain where possible. To obtain a uniform coverage, always wipe evenly, taking care to lightly remove any excess Floor Wax immediately with a separate, clean absorbent cloth, again following the direction of the grain pattern.

Best results are achieved when Fiddes Floor Wax is applied sparingly, and worked in small areas at any one time. Buff to desired sheen level by hand or mechanical polisher.

- **Application:**  
Sparingly with a clean cotton cloth.
- **Drying Time:**  
10 – 15 minutes at room temperature.
- **Coverage:**  
16 sqm per Litre (depending on substrate and method of application).
- **Coats:**  
1 coat
- **Recommended for use on:**  
Floors and surfaces of fine furniture and cabinet work.
- **Packaging:**  
1lt – 2lt – 5lt containers

# Floor Surface Cleaner



Non abrasive rinse free formulation, Fiddes Floor Surface Cleaner is suitable for application on to all types of pre-finished wood flooring. Revives & maintains floors, requires no rinsing & dries completely smear free.

## Application

### General surface cleaning:

Add 2 cap fulls Fiddes Floor Surface Cleaner to 4 litres warm water. Apply with a mop or cloth, ensuring even application. Remove any excess residue and allow to dry.

Floor will dry clean in 20 minutes under normal conditions.

Test on small area first prior to application.

# Floor Reviver Kit



Manufactured from a blend of natural oils and solvents, Fiddes Floor Reviver will locally remove light surface marking from wood flooring and internal wood substrates, whilst maintaining the original finish.

## Preparation

For use on previously finished or sealed wood floors and surfaces treated with Fiddes Hard Wax Oil. Ensure all surfaces are free from dust and test on a small inconspicuous areas first.

## Application

Wash area with Fiddes Floor Surface Cleaner, and allow to dry.

Take a clean cotton cloth and lightly apply with a small circular motion, working well into the surface. To obtain a uniform coverage, always wipe evenly, taking care to lightly remove any excess immediately with a separate, clean absorbent cloth.

A green Scotch-Brite pad may also be used to apply Fiddes Surface Reviver where heavy surface marking is apparent.



- **Application:**

- Sparingly with a clean cotton cloth or green Scotch-Brite pad

- **Coats:**

- 1 application with possibly second application where further surface cleansing is required

- **Recommended for use on:**

- Flooring treated with Fiddes Hard Wax Oil & internal wood surfaces.



## Barrier Seal

Fiddes Barrier Seal provides a quick drying, surface barrier coat that is ideal for application onto oily, reclaimed or contaminated floor surfaces prior to application of Fiddes Supreme Hard Wax Oil or Fiddes Liquid Floor Wax.

### Preparation

Ensure any previous floor finish has been removed.

Sanding may be necessary where contamination is severe.

Wash using solution of Fiddes Supreme Surface Cleaner and allow to dry.

### Application

Stir contents thoroughly before and during use, and apply in a warm well ventilated room. Use a good quality bristle or synthetic brush and lay evenly in the direction of the grain.

Fiddes Barrier Seal will dry in 15 minutes under good conditions, and may be thinned by 10-15% with Methylated Spirits where appropriate.


NOTE: Significantly longer drying times will occur under cold, damp or humid conditions.

On dense oily timbers, apply maximum one coat.

Always pre-test on a small area first.

### Coverage

Approx 14 square metres per litre depending on absorbency of wood.

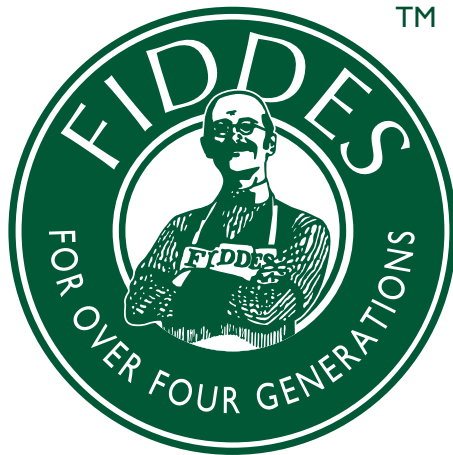

Distributed by:

FIDDES & SON LTD  
FLORENCE WORKS, BRINDLEY ROAD, CARDIFF CF11 8TX  
TEL: +44 (0) 29 2034 0323 FAX: +44 (0) 29 2034 3235  
EMAIL: FINISHES@FIDDES.CO.UK

**[WWW.FIDDES.CO.UK](http://WWW.FIDDES.CO.UK)**